

MEGA 1


M I G R A N G E





WITH TWECO® FRONT END CONSUMABLES

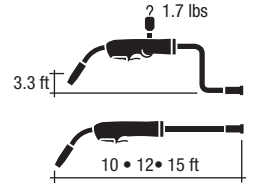

TECHNICAL DATA

Voltage class	L
Cooling	Air cooled
Wire Ø in	.023 to .045
Duty cycle 60%	200A CO ₂ • 160A Mix



ADAPTOR	MODEL	FEET	ADAPTOR	MODEL	FEET
	MA5100	10		MA5100M	10
	MA5101	12		MA5101M	12
	MA5102	15		MA5102M	15
	MA5165	10		MA5100L	10
	MA5166	12		MA5101L	12
	MA5167	15		MA5102L	15

OTHER CONNECTORS AVAILABLE UPON REQUEST

DECLARATION OF CONFORMITY


The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.



EN 60974-7

trafimet®

your welding partner




MF0245




ME0018 (51)




- MD0008-06 (11-23) Compatible
- MD0008-08 (11-30) Compatible
- MD0008-09 (11-35) Compatible
- MD0008-10 (11-40) Compatible
- MD0008-12 (11-45) Compatible




MC0030 (21-37)
Ø 3/8"



MC0031 • Standard (21-50)
Ø 1/2"




MC0032 (21-62)
Ø 5/8"



MC0033 (21-62 FAS)

LINERS

STEEL	TEFLON
ft - wire .023 - .035 -	
15 GM0011 (42-3035-15)	
ft - wire .040 - .045 -	
15 GM0012 (42-4045-15)	GM0230 (42N-3545-15)
ft - wire .045 - 1/16"	
15	

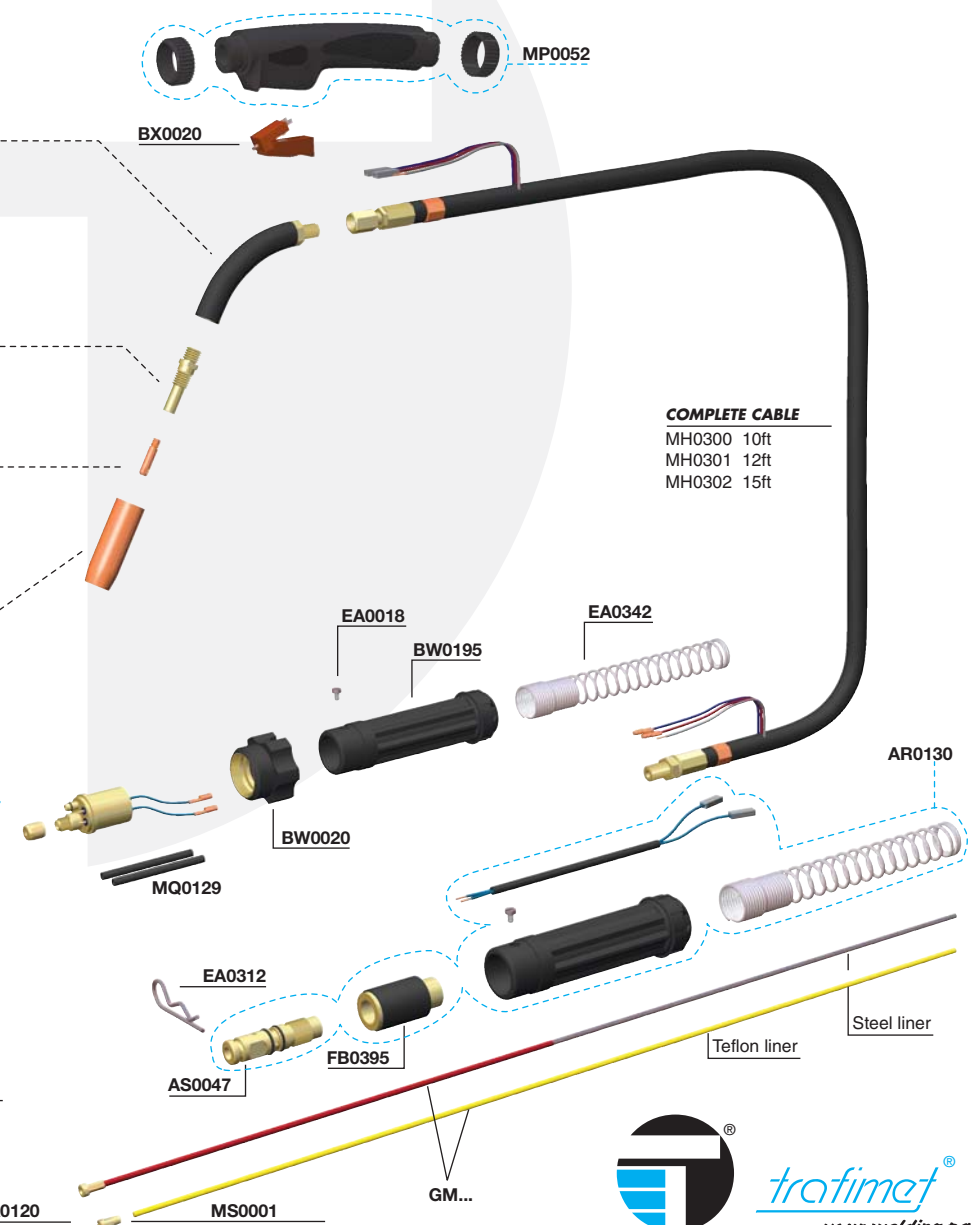

COMPLETE CABLE

- MH0300 10ft
- MH0301 12ft
- MH0302 15ft

