

MEGA 2


M I G R A N G E





WITH TWECO® FRONT END CONSUMABLES



TECHNICAL DATA

Voltage class	L
Cooling	Air cooled
Wire Ø in	.030 to .045
Duty cycle 60%	250A CO ₂ • 200A Mix



ADAPTOR	MODEL	FEET	ADAPTOR	MODEL	FEET
	MA5200	10		MA5200M	10
	MA5201	12		MA5201M	12
	TW-MK MA5202	15		MILLER® MA5202M	15
	MA5265	10		MA5200L	10
	EURO-TW MA5266	12		MA5201L	12
	SPRING PINS MA5267	15		LINCOLN® MA5202L	15

OTHER CONNECTORS AVAILABLE UPON REQUEST

DECLARATION OF CONFORMITY


The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.



EN 60974-7

trafimet®

your welding partner

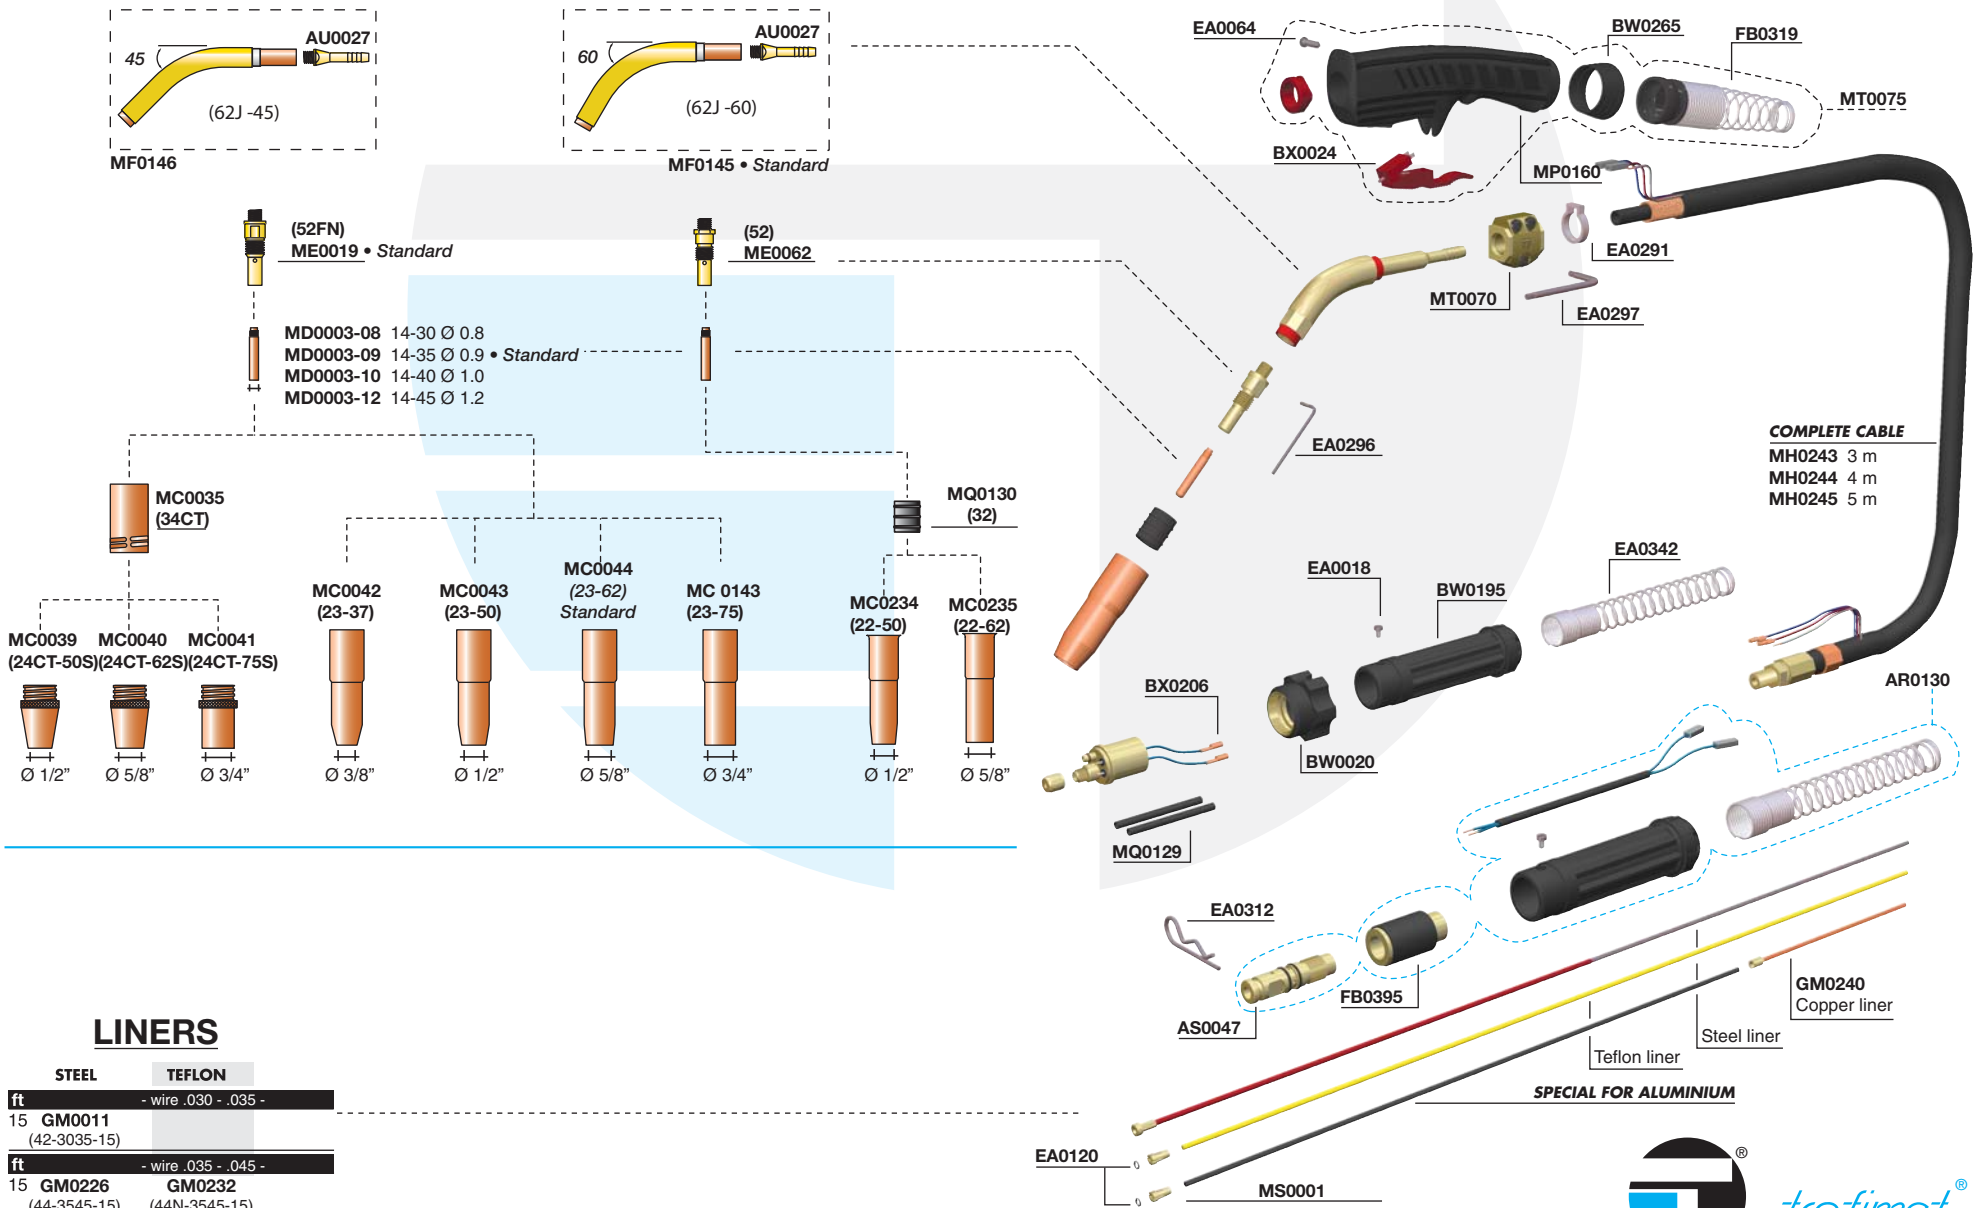

LINERS

ft	STEEL	TEFLON
15	GM0011 (42-3035-15)	- wire .030 - .035 -
15	GM0226 (44-3545-15)	- wire .035 - .045 - GM0232 (44N-3545-15)
15		- wire .045 - 1/16"

