

# MEGA 4


M I G R A N G E





WITH TWECO® FRONT END CONSUMABLES

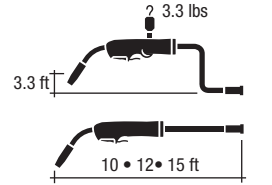

## TECHNICAL DATA

Voltage class	L
Cooling	Air cooled
Wire Ø in	.030 to 1/16"
Duty cycle 60%	400A CO <sub>2</sub> • 300A Mix



ADAPTOR	MODEL	FEET	ADAPTOR	MODEL	FEET
	MA5400	10		MA5400M	10
	MA5401	12		MA5401M	12
	MA5402	15		MA5402M	15
	MA5465	10		MA5400L	10
	MA5466	12		MA5401L	12
	MA5467	15		MA5402L	15

OTHER CONNECTORS AVAILABLE UPON REQUEST

## DECLARATION OF CONFORMITY




The undersigned company Trafimet - Via del Lavoro, 8 - 36020 Castegnero (VI) - Italy - declares that the product identified and described on this page complies with standard EN 60974-7 in accordance with the requirements contemplated by directive EEC 73/23 low voltage.




EN 60974-7

*trafimet*®

*your welding partner*

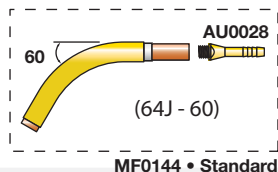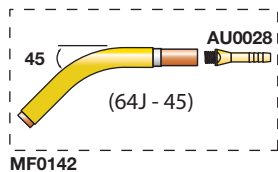


- MD0004-08 14-30 Ø 0.8
- MD0004-09 14-35 Ø 0.9
- MD0004-10 14-40 Ø 1.0
- MD0004-12 14-45 Ø 1.2 • Standard
- MD0004-14 14-52 Ø 1.4
- MD0004-16 14-116 Ø 1.6

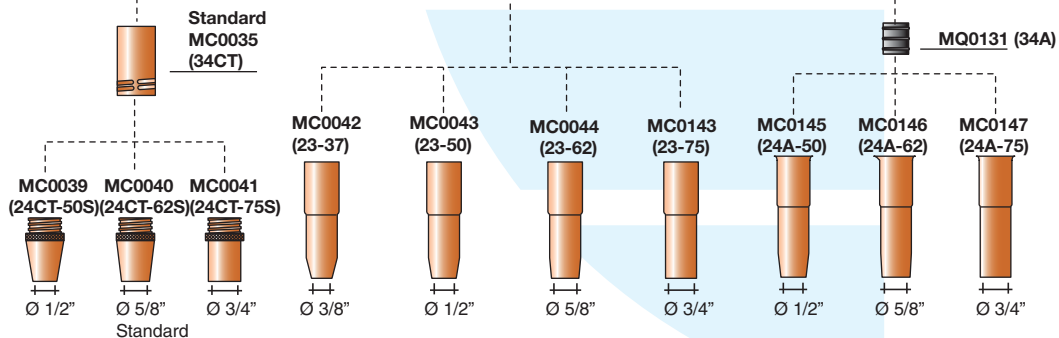

## LINERS

	STEEL	TEFLON
ft	- wire .035 - .045 -	
15	GM0226 (44-3545-15)	GM0232 (44N-3545-15)
ft	- wire .045 - 1/16" -	
15	GM0013 (44-116-15)	GM0231 (44N-116-15)
ft	- wire 1/16" - 5/64"	
15	GM0221 (44-564-15)	

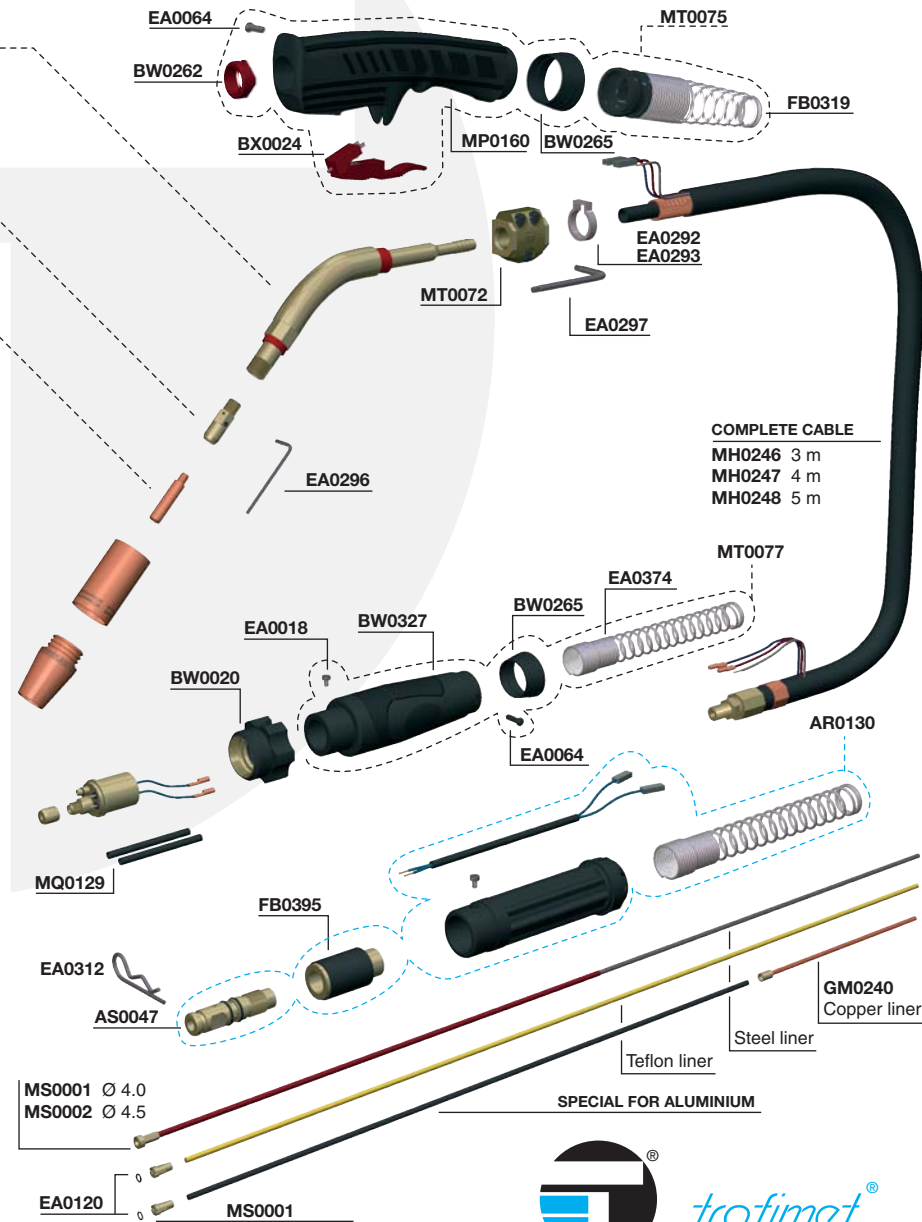

COMPLETE CABLE  
MH0246 3 m  
MH0247 4 m  
MH0248 5 m

